

SGM7SZ14


Small Logic Inverter with Schmitt Trigger Input

GENERAL DESCRIPTION

The SGM7SZ14 is a single inverter with Schmitt trigger input from SGMICRO's Small Logic series. The device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive while maintaining low static power dissipation over a broad V_{CC} operating range. The device is specified to operate over the 1.65V to 5.5V V_{CC} operating range. The input and output are high impedance when V_{CC} is 0V. The input tolerates voltages up to 6V, independent of V_{CC} operating voltage.

The SGM7SZ14 is available in Green SOT-23-5 and SC70-5 packages. It operates over an ambient temperature range of -40°C to +125°C.

LOGIC SYMBOL

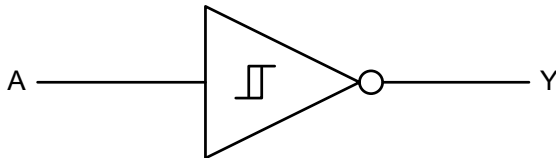

FEATURES

- **Ultra-High Speed:** $t_{PD} = 4.2\text{ns}$ (TYP) into 50pF at $V_{CC} = 3.3\text{V}$
- **High Output Drive:** $\pm 24\text{mA}$ at $V_{CC} = 3\text{V}$
- **Broad V_{CC} Operating Range:** 1.65V to 5.5V
- **Matches Performance of LCX Operated at $V_{CC} = 3.3\text{V}$**
- **Power Down High-Impedance Input/Output**
- **Over-Voltage Tolerant Input Facilitates 5V to 3V Translation**
- **Available in Green SOT-23-5 and SC70-5 Packages**

FUNCTION TABLE


INPUT	OUTPUT
A	Y
L	H
H	L

$$Y = \bar{A}$$

H = High Voltage Level

L = Low Voltage Level

PIN CONFIGURATIONS

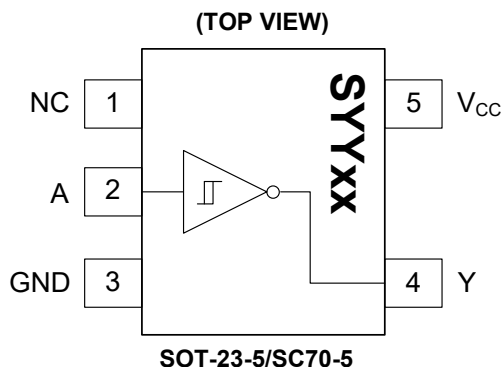

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	NC	No Connection.
2	A	Input. Unused input must be held high or low. It may not float.
3	GND	Ground.
4	Y	Output.
5	V _{CC}	Power Supply.

ELECTRICAL CHARACTERISTICS(Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	V _{CC} (V)	MIN	TYP	MAX	UNITS				
General											
Power Supply Range	V _{CC}			1.65		5.50	V				
Supply Voltage Data Retention				1.50		5.50					
Input Voltage	V _{IN}			0.00		5.50	V				
Output Voltage	V _{OUT}			0.00		V _{CC}	V				
DC Performance											
Positive Threshold Voltage	V _P		1.65	0.70	0.96	1.20	V				
			1.80	0.75	1.04	1.30					
			2.30	1.00	1.30	1.55					
			3.00	1.35	1.65	1.95					
			4.50	2.05	2.40	2.70					
			5.50	2.60	2.92	3.25					
Negative Threshold Voltage	V _N		1.65	0.35	0.53	0.70	V				
			1.80	0.40	0.57	0.75					
			2.30	0.60	0.77	0.95					
			3.00	0.85	1.04	1.20					
			4.50	1.35	1.56	1.75					
			5.50	1.65	1.90	2.10					
Hysteresis Voltage	V _H		1.65	0.10	0.43	0.70	V				
			1.80	0.14	0.46	0.75					
			2.30	0.18	0.52	0.80					
			3.00	0.22	0.60	0.95					
			4.50	0.37	0.83	1.25					
			5.50	0.60	1.02	1.40					
High-Level Output Voltage	V _{OH}	V _{IN} = V _{IL}	I _{OH} = -100μA	1.65	1.62	1.65	V				
				1.80	1.77	1.80					
				2.30	2.27	2.30					
				3.00	2.97	3.00					
				4.50	4.47	4.50					
			I _{OH} = -4mA	1.65	1.46	1.55					
			I _{OH} = -8mA	2.30	2.01	2.18					
			I _{OH} = -16mA	3.00	2.49	2.81					
			I _{OH} = -24mA	3.00	2.30	2.70					
			I _{OH} = -32mA	4.50	3.98	4.20					
Low-Level Output Voltage	V _{OL}	V _{IN} = V _{IH}	I _{OL} = 100μA	1.65		0.00	V				
				1.80		0.00					
				2.30		0.00					
				3.00		0.00					
				4.50		0.00					
			I _{OL} = 4mA	1.65		0.06					
			I _{OL} = 8mA	2.30		0.09					
			I _{OL} = 16mA	3.00		0.16					
			I _{OL} = 24mA	3.00		0.24					
			I _{OL} = 32mA	4.50		0.29					
			Input Leakage Current	I _{IN}	V _{IN} = 5.5V, GND	0 to 5.5			±0.10	±5	μA
			Power-Off Leakage Current	I _{OFF}	V _{IN} or V _{OUT} = 5.5V	0			0.10	5	μA
			Quiescent Supply Current	I _{CC}	V _{IN} = 5.5V, GND	1.65 to 5.5			0.10	10	μA


ELECTRICAL CHARACTERISTICS (continued)(Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
AC Performance						
Propagation Delay	t _{PHL} , t _{PLH}	V _{CC} = 1.65V	C _L = 15pF, R _L = 1MΩ, Figure 1, Figure 2		9.3	ns
		V _{CC} = 1.80V			7.6	
		V _{CC} = 2.50V ± 0.20V			4.7	
		V _{CC} = 3.30V ± 0.30V			3.6	
		V _{CC} = 5.00V ± 0.50V			2.7	
		V _{CC} = 3.30V ± 0.30V		C _L = 50pF, R _L = 500Ω, Figure 1, Figure 2		
		V _{CC} = 5.00V ± 0.50V			3.2	
Input Capacitance	C _{IN}	V _{CC} = 0V		4.0		pF
Power Dissipation Capacitance ⁽²⁾	C _{PD}	V _{CC} = 3.30V	Figure 3		17.0	pF
		V _{CC} = 5.00V			19.0	

NOTES:

- Unused input must be held high or low. It may not float.
- C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle (see Figure 3). C_{PD} is related to dynamic operating current I_{CCD} by the expression: I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC,Static}).

TEST CIRCUITS

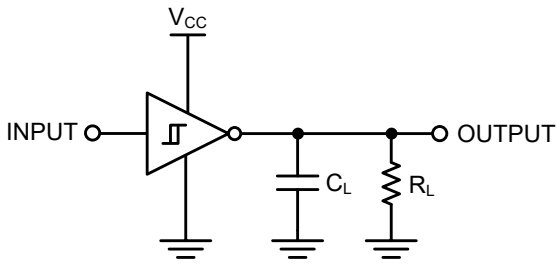

C_L includes load and stray capacitance;
Input PRR = 1.0MHz; t_w = 500ns.

Figure 1. AC Test Circuit


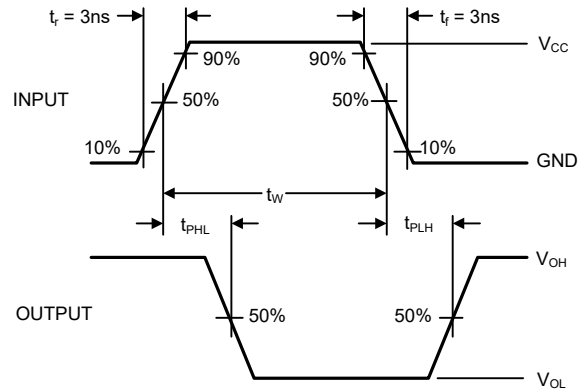


Figure 2. AC Waveforms



Input = AC Waveform; $t_r = t_f = 1.8ns$;
PRR = 10MHz; Duty Cycle = 50%.

Figure 3. I_{CCD} Test Circuit

REVISION HISTORY



NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

FEBRUARY 2021 – REV.A to REV.A.1	Page
Changed operating temperature range	All
Changes from Original (OCTOBER 2013) to REV.A	Page
Changed from product preview to production data.....	All



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

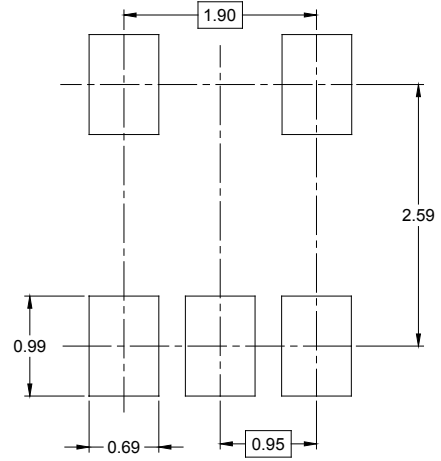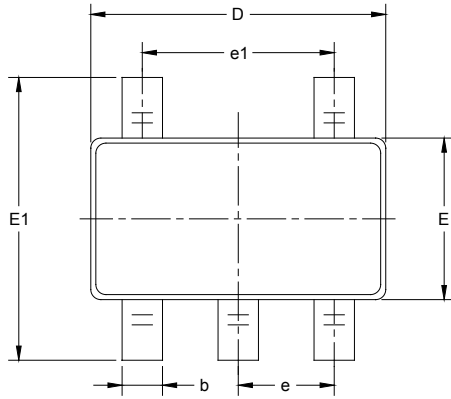



RECOMMENDED LAND PATTERN (Unit: mm)

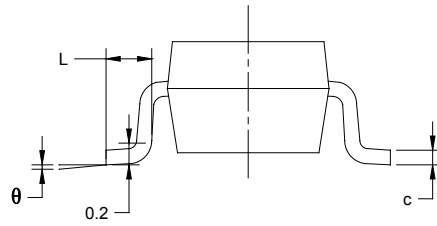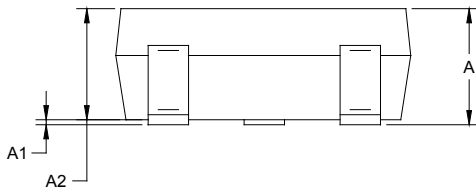



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

SC70-5

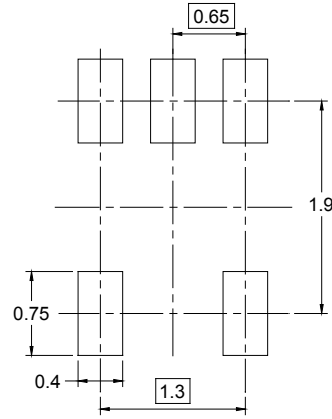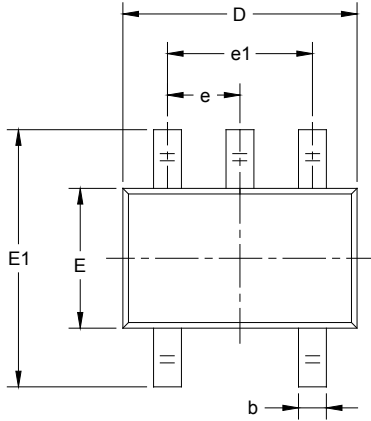

RECOMMENDED LAND PATTERN (Unit: mm)

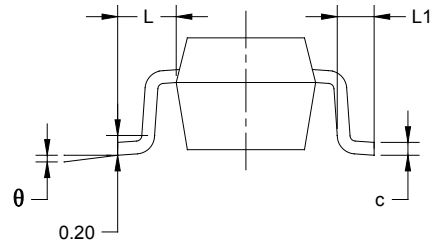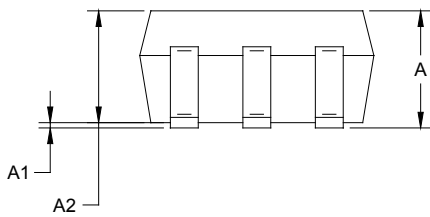

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
	0°	8°	0°	8°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS

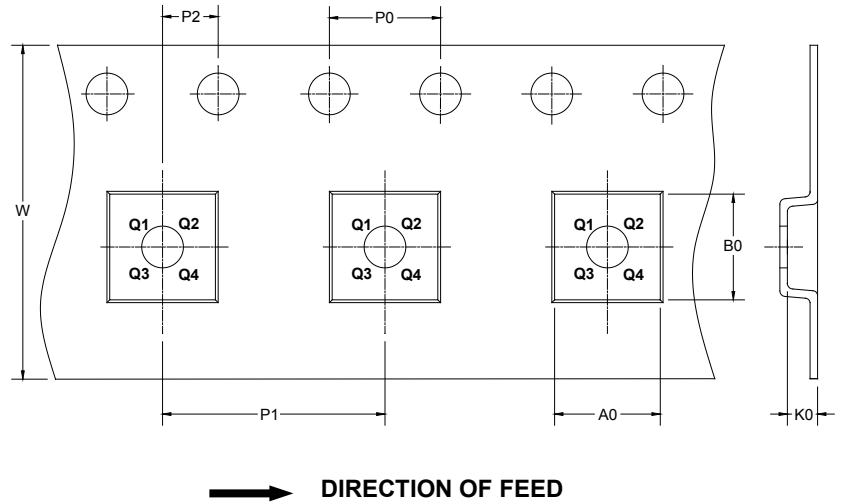

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SC70-5	7"	9.5	2.25	2.55	1.20	4.0	4.0	2.0	8.0	Q3

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002