

GENERAL DESCRIPTION

The SGM8270-4 is a low noise, precision, high voltage quad operational amplifier which is designed to offer a wide input common mode voltage range and output voltage swing. The device can operate from $\pm 1.65\text{V}$ to $\pm 18\text{V}$ dual power supplies or from 3.3V to 36V single supply.


The device features low noise, high slew rate, low input bias and offset current, and low offset voltage.

The SGM8270-4 is available in Green SOIC-14 and TSSOP-14 packages. It is specified over the extended -40°C to $+125^\circ\text{C}$ temperature range.

FEATURES

- Wide Input Common Mode and Differential Voltage Ranges
- Low Input Bias and Offset Current
- Output Short-Circuit Protection
- Rail-to-Rail Input and Output
- High Input Impedance
- Low Offset Voltage: 1.2mV (MAX)
- Low Noise: $15\text{nV}/\sqrt{\text{Hz}}$ at 1kHz
- Gain-Bandwidth Product: 2.2MHz
- High Slew Rate: $8\text{V}/\mu\text{s}$
- -40°C to $+125^\circ\text{C}$ Operating Temperature Range
- Available in Green SOIC-14 and TSSOP-14 Packages

PIN CONFIGURATIONS

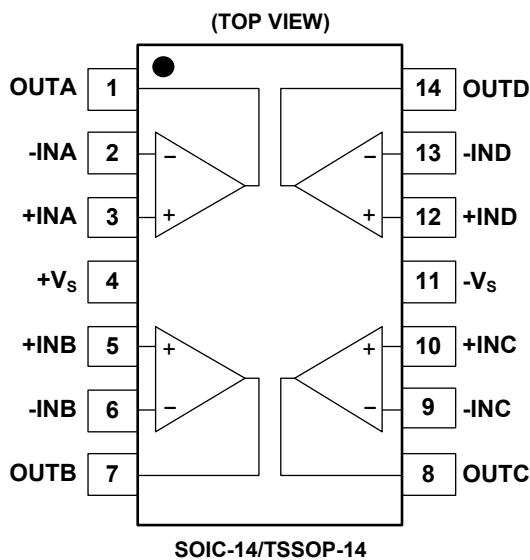

APPLICATIONS

- High Impedance Sensor
- Photodiode Amplifier
- High End, Professional Audio
- DAC Output Amplifier
- Medical


PACKAGE/ORDERING INFORMATION

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|-----------|---------------------|-----------------------------|--------------------|----------------------------|---------------------|
| SGM8270-4 | SOIC-14 | -40°C to +125°C | SGM8270-4XS14G/TR | SGM82704XS14 XXXXX | Tape and Reel, 2500 |
| | TSSOP-14 | -40°C to +125°C | SGM8270-4XTS14G/TR | SGM82704 XTS14 XXXXX | Tape and Reel, 4000 |

MARKING INFORMATION

XXXXX = Date Code, Trace Code and Vendor Code.

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, +Vs to -Vs..... 40V
 Input/Output Voltage Range.....(-Vs) - 0.3V to (+Vs) + 0.3V
 Junction Temperature.....+150°C
 Storage Temperature Range.....-65°C to +150°C
 Lead Temperature (Soldering, 10s).....+260°C
 ESD Susceptibility
 HBM..... 6000V
 CDM 1000V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range.....-40°C to +125°C

NOTE:

1. Proper power supply sequencing is recommended for the CMOS device. Always sequence Vs on first, followed by the inputs and outputs.

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.







ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_S = \pm 1.65\text{V}$ to $\pm 18\text{V}$ and $R_L = 2\text{k}\Omega$ connected to 0V , Full = -40°C to $+125^\circ\text{C}$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | TEMP | MIN | TYP | MAX | UNITS |
|---------------------------------------|--------------------------|--|---------------------|----------------|----------|----------------|------------------------------|
| Input Characteristics | | | | | | | |
| Input Offset Voltage | V_{OS} | $V_{CM} = 0\text{V}$ | $+25^\circ\text{C}$ | | 0.2 | 1.2 | mV |
| | | | Full | | | 1.4 | |
| Input Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | Full | | 0.8 | | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current | I_B | $V_{CM} = 0\text{V}$ | $+25^\circ\text{C}$ | | ± 5 | ± 120 | pA |
| Input Offset Current | I_{OS} | $V_{CM} = 0\text{V}$ | $+25^\circ\text{C}$ | | ± 5 | ± 120 | pA |
| Maximum Differential Input Voltage | $ V_{ID} $ | | Full | | | V_S | V |
| Maximum Input Difference Bias Current | $ I_{ID} $ | $V_S = \pm 18\text{V}$, $V_{ID} = \pm 18\text{V}$ | $+25^\circ\text{C}$ | | 2 | 3 | μA |
| | | | Full | | | 4 | |
| Input Common Mode Voltage Range | V_{CM} | | Full | $(-V_S) - 0.1$ | | $(+V_S) + 0.1$ | V |
| Common Mode Rejection Ratio | CMRR | $V_S = \pm 18\text{V}$, $(-V_S) - 0.1\text{V} < V_{CM} < (+V_S) - 1.5\text{V}$ | $+25^\circ\text{C}$ | 96 | 110 | | dB |
| | | | Full | 85 | | | |
| | | $V_S = \pm 18\text{V}$, $(-V_S) - 0.1\text{V} < V_{CM} < (+V_S) + 0.1\text{V}$ | $+25^\circ\text{C}$ | 78 | 88 | | |
| | | | Full | 75 | | | |
| Open-Loop Voltage Gain | A_{OL} | $(-V_S) + 0.2\text{V} < V_{OUT} < (+V_S) - 0.2\text{V}$, $R_L = 10\text{k}\Omega$ | $+25^\circ\text{C}$ | 101 | 130 | | dB |
| | | | Full | 98 | | | |
| | | $(-V_S) + 0.5\text{V} < V_{OUT} < (+V_S) - 0.5\text{V}$, $R_L = 2\text{k}\Omega$ | $+25^\circ\text{C}$ | 101 | 120 | | |
| | | | Full | 81 | | | |
| Output Characteristics | | | | | | | |
| Output Voltage Swing from Rail | V_{OUT} | $V_S = \pm 18\text{V}$, $R_L = 10\text{k}\Omega$ | $+25^\circ\text{C}$ | | 65 | 85 | mV |
| | | | Full | | | 110 | |
| | | $V_S = \pm 18\text{V}$, $R_L = 2\text{k}\Omega$ | $+25^\circ\text{C}$ | | 320 | 420 | |
| | | | Full | | | 550 | |
| Output Short-Circuit Current | I_{SC} | $V_S = \pm 18\text{V}$ | $+25^\circ\text{C}$ | ± 28 | ± 40 | | mA |
| Power Supply | | | | | | | |
| Operating Voltage Range | V_S | | Full | 3.3 | | 36 | V |
| Quiescent Current | I_Q | $I_{OUT} = 0$ | $+25^\circ\text{C}$ | | 2 | 2.6 | mA |
| | | | Full | | | 3 | |
| Power Supply Rejection Ratio | PSRR | $V_S = 3.3\text{V}$ to 36V | $+25^\circ\text{C}$ | 105 | 125 | | dB |
| | | | Full | 102 | | | |
| Dynamic Performance | | | | | | | |
| Gain-Bandwidth Product | GBP | $C_L = 50\text{pF}$ | $+25^\circ\text{C}$ | | 2.2 | | MHz |
| Phase Margin | ϕ_O | $C_L = 50\text{pF}$ | $+25^\circ\text{C}$ | | 65 | | $^\circ$ |
| Slew Rate | SR | $V_S = \pm 2.5\text{V}$ to $\pm 18\text{V}$, $G = +1$ | $+25^\circ\text{C}$ | | 8 | | $\text{V}/\mu\text{s}$ |
| Overload Recovery Time | ORT | $V_{IN} \times G > V_S$ | $+25^\circ\text{C}$ | | 1 | | μs |
| Total Harmonic Distortion + Noise | THD+N | $V_S = \pm 2.5\text{V}$ to $\pm 18\text{V}$, $V_{OUT} = 2V_{P-P}$, $f = 1\text{kHz}$, $G = +1$, $R_L = 600\Omega$ | $+25^\circ\text{C}$ | | 0.002 | | % |
| | | | $+25^\circ\text{C}$ | | 0.0005 | | |
| Noise | | | | | | | |
| Input Voltage Noise | | $f = 0.1\text{Hz}$ to 10Hz | $+25^\circ\text{C}$ | | 3.5 | | μV_{P-P} |
| Input Voltage Noise Density | e_n | $f = 10\text{Hz}$ | $+25^\circ\text{C}$ | | 80 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | $f = 1\text{kHz}$ | $+25^\circ\text{C}$ | | 15 | | |
| Input Current Noise Density | i_n | $f = 1\text{kHz}$ | $+25^\circ\text{C}$ | | 300 | | $\text{fA}/\sqrt{\text{Hz}}$ |

TYPICAL PERFORMANCE CHARACTERISTICS


At $T_A = +25^\circ\text{C}$, $V_S = 36\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

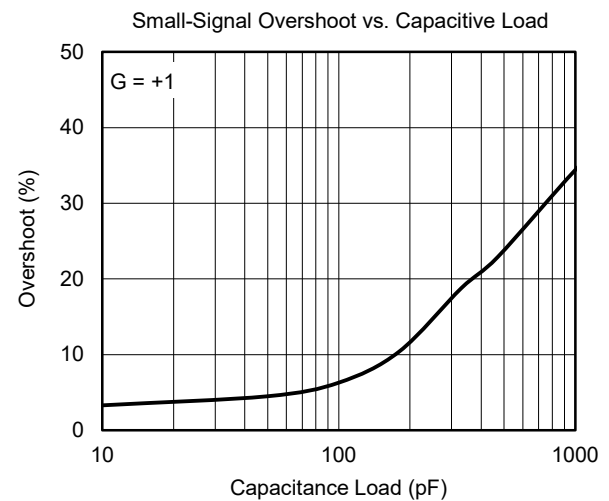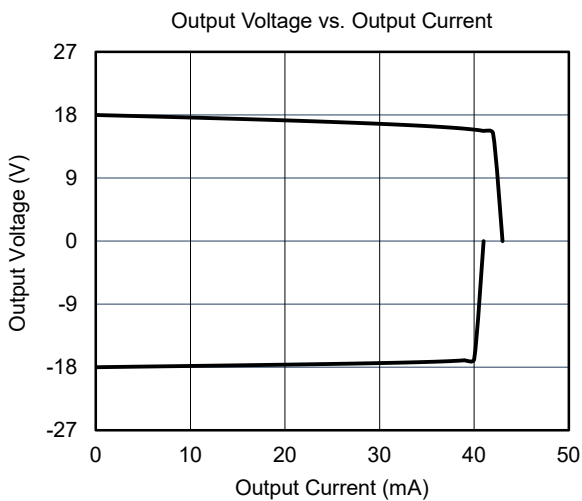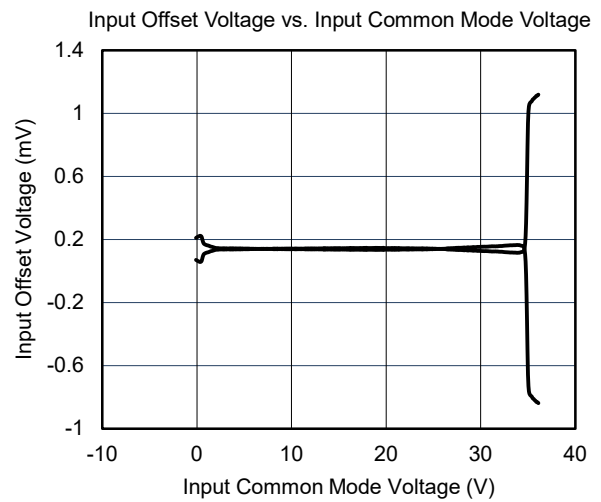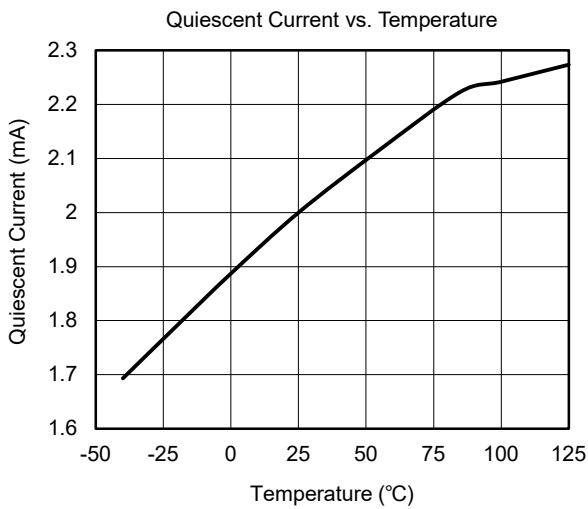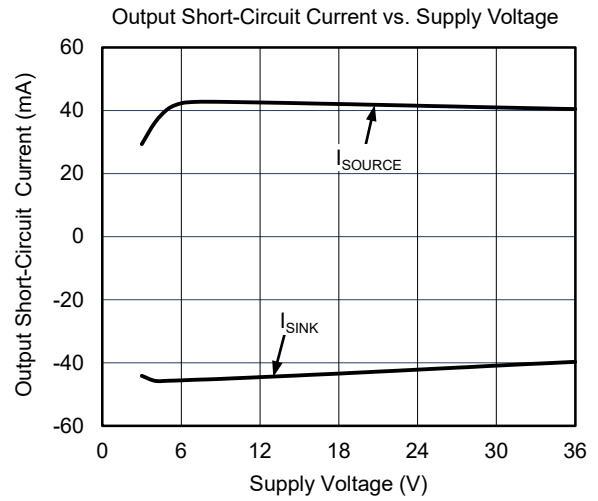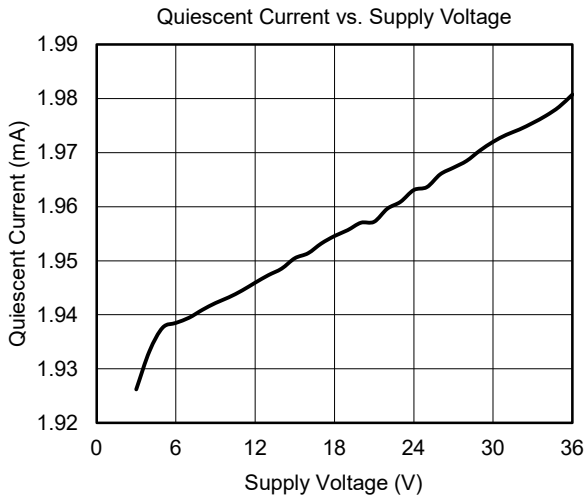

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 36\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

Large-Signal Step Response

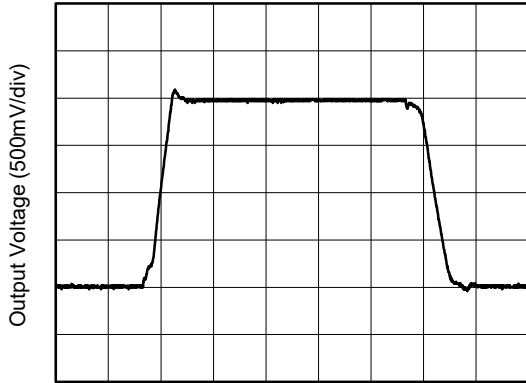


Time (500ns/div)

Small-Signal Step Response




Time (500ns/div)

CMRR and PSRR vs. Frequency

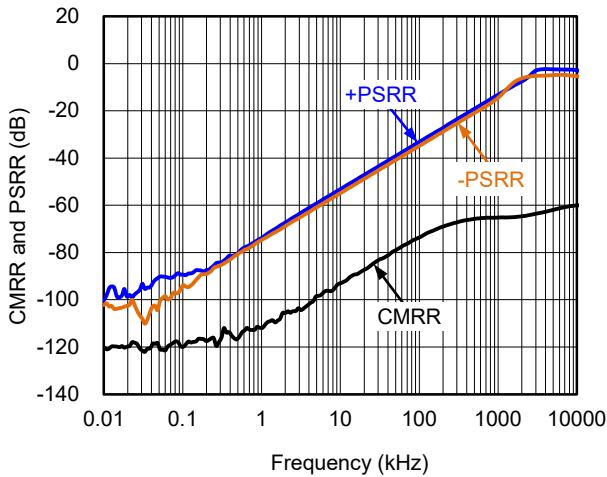


Frequency (kHz)

Open-Loop Gain and Phase vs. Frequency

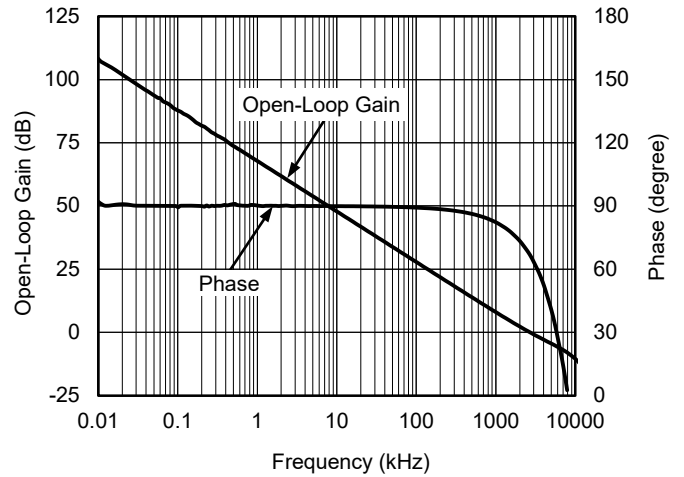


Frequency (kHz)

Maximum Output Voltage vs. Frequency

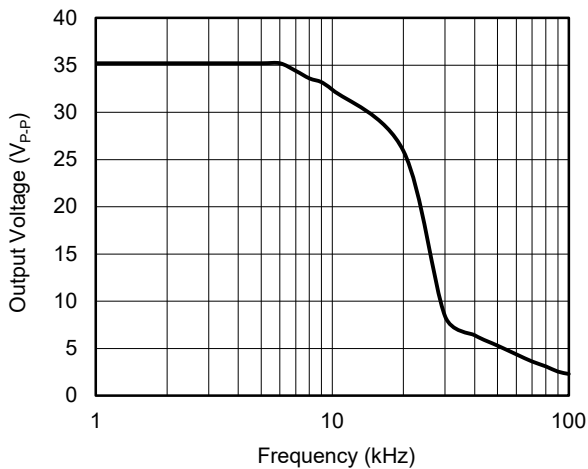

Frequency (kHz)






Input Voltage Noise Density vs. Frequency

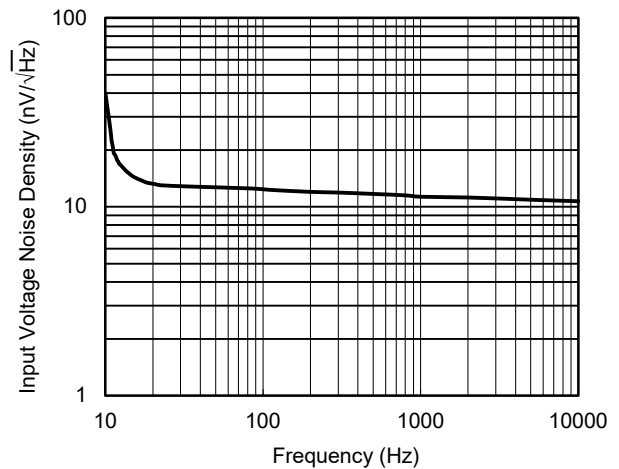

Frequency (Hz)

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 36\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

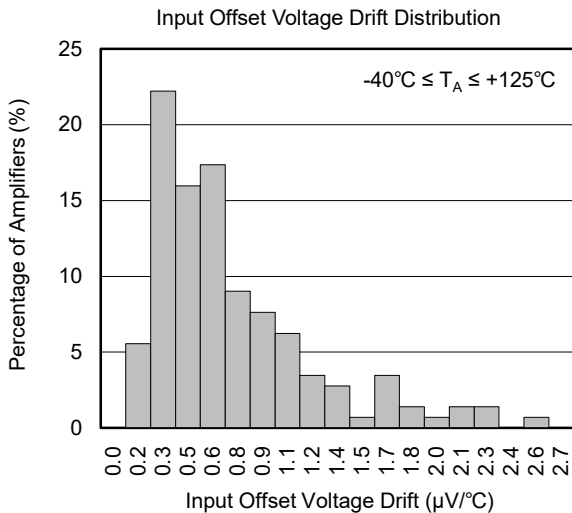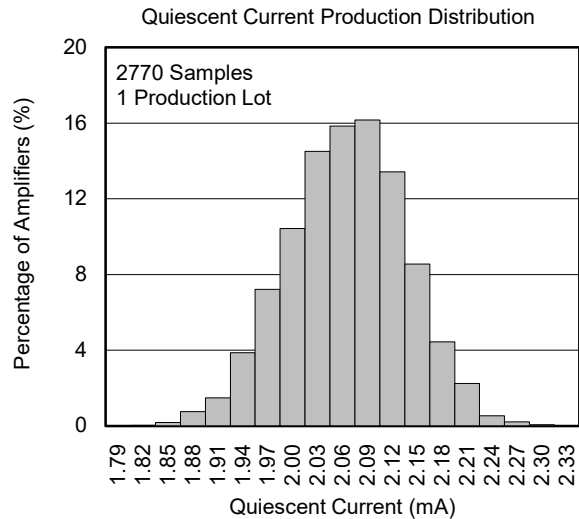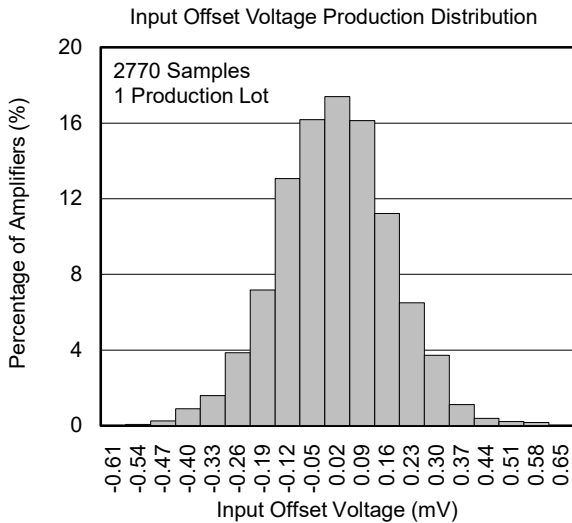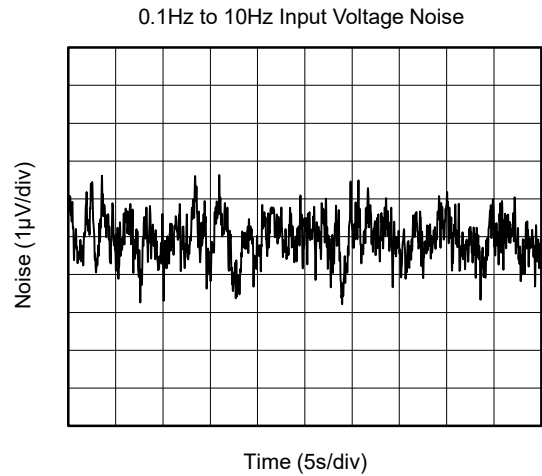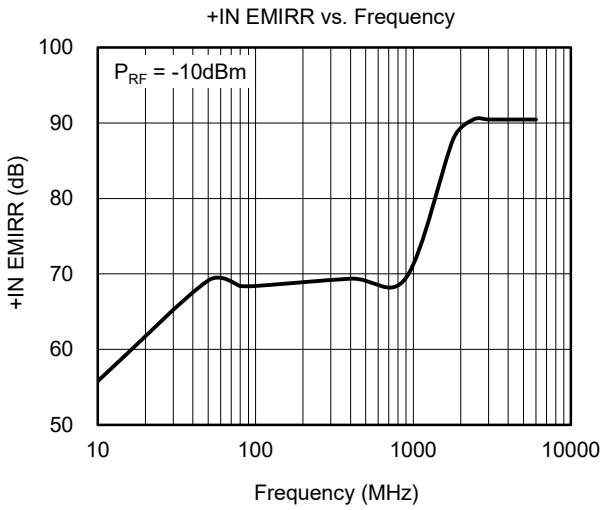

REVISION HISTORY


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Original (AUGUST 2019) to REV.A | Page |
|--|-------------|
| Changed from product preview to production data..... | All |


PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOIC-14

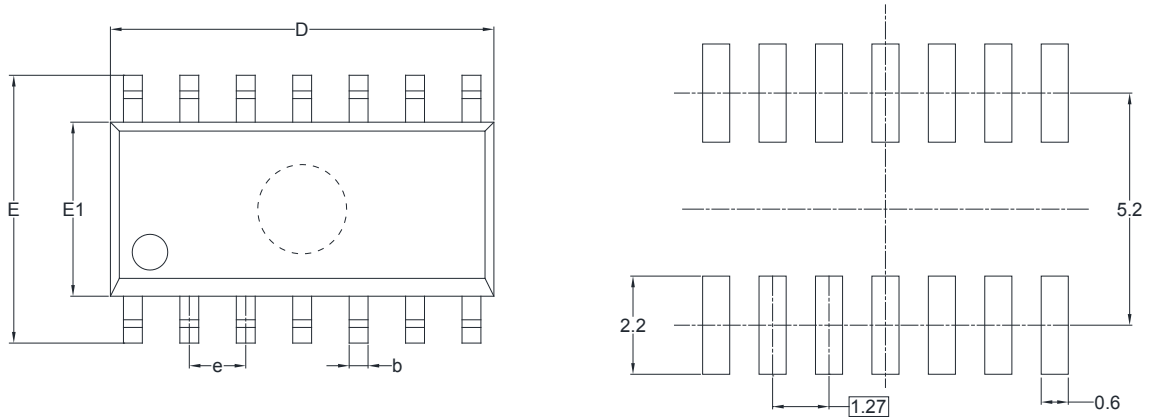



RECOMMENDED LAND PATTERN (Unit: mm)

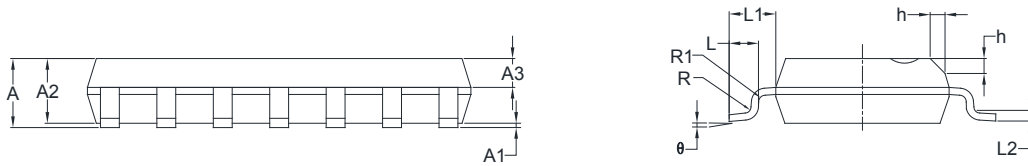



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.35 | 1.75 | 0.053 | 0.069 |
| A1 | 0.10 | 0.25 | 0.004 | 0.010 |
| A2 | 1.25 | 1.65 | 0.049 | 0.065 |
| A3 | 0.55 | 0.75 | 0.022 | 0.030 |
| b | 0.36 | 0.49 | 0.014 | 0.019 |
| D | 8.53 | 8.73 | 0.336 | 0.344 |
| E | 5.80 | 6.20 | 0.228 | 0.244 |
| E1 | 3.80 | 4.00 | 0.150 | 0.157 |
| e | 1.27 BSC | | 0.050 BSC | |
| L | 0.45 | 0.80 | 0.018 | 0.032 |
| L1 | 1.04 REF | | 0.040 REF | |
| L2 | 0.25 BSC | | 0.01 BSC | |
| R | 0.07 | | 0.003 | |
| R1 | 0.07 | | 0.003 | |
| h | 0.30 | 0.50 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 8° |

PACKAGE OUTLINE DIMENSIONS

TSSOP-14

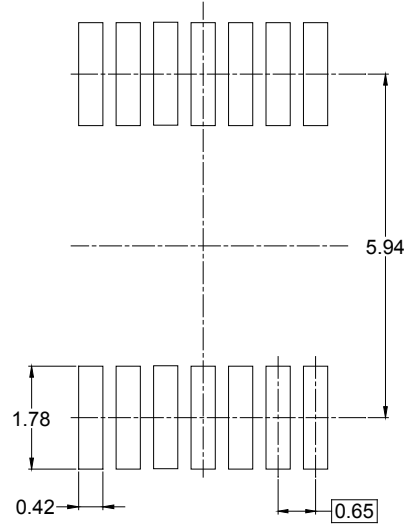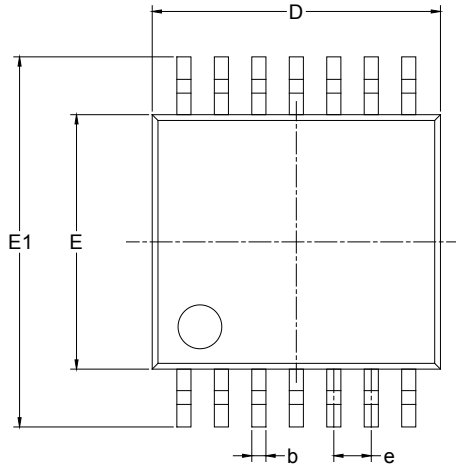


RECOMMENDED LAND PATTERN (Unit: mm)

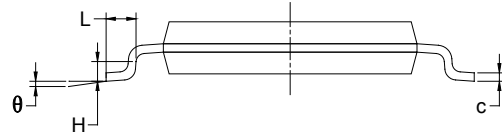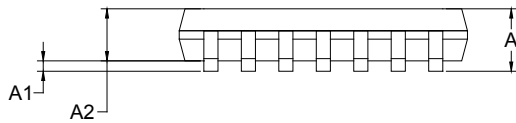

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | | 1.200 | | 0.047 |
| A1 | 0.050 | 0.150 | 0.002 | 0.006 |
| A2 | 0.800 | 1.050 | 0.031 | 0.041 |
| b | 0.190 | 0.300 | 0.007 | 0.012 |
| c | 0.090 | 0.200 | 0.004 | 0.008 |
| D | 4.860 | 5.100 | 0.191 | 0.201 |
| E | 4.300 | 4.500 | 0.169 | 0.177 |
| E1 | 6.250 | 6.550 | 0.246 | 0.258 |
| e | 0.650 BSC | | 0.026 BSC | |
| L | 0.500 | 0.700 | 0.02 | 0.028 |
| H | 0.25 TYP | | 0.01 TYP | |
| θ | 1° | 7° | 1° | 7° |

TAPE AND REEL INFORMATION

REEL DIMENSIONS

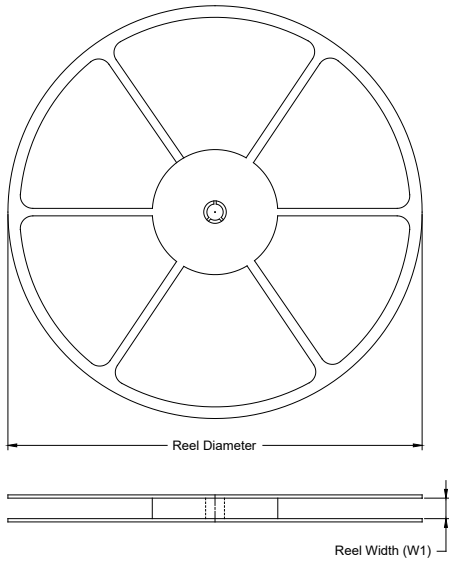

TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOIC-14 | 13" | 16.4 | 6.60 | 9.30 | 2.10 | 4.0 | 8.0 | 2.0 | 16.0 | Q1 |
| TSSOP-14 | 13" | 12.4 | 6.95 | 5.60 | 1.20 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |

D00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-----------|-------------|------------|-------------|--------------|
| 13" | 386 | 280 | 370 | 5 |

DD0002